




HENGZHUN


东莞力显仪器科技有限公司

DONG GUAN LIXIAN INSTRUMENT SCIENTIFIC CO.,LTD

# Introduction

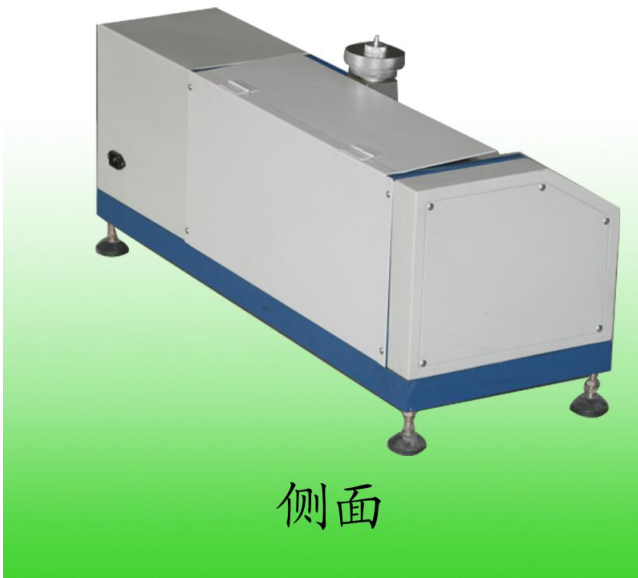

侧面

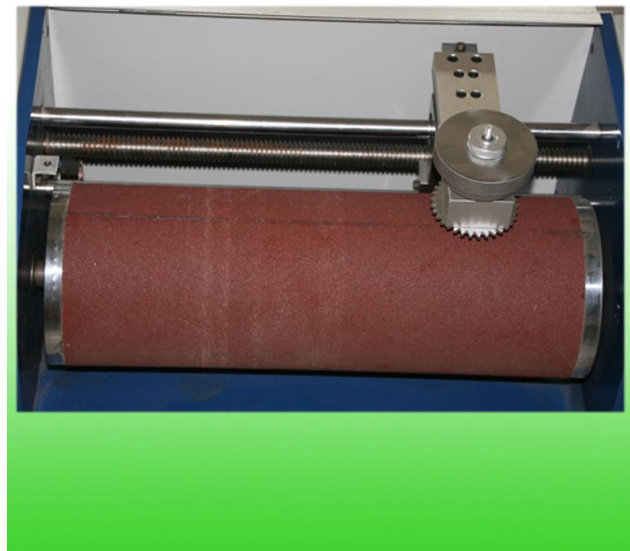

Side and back

Tel: +86 769-23388229

Fax:+86 769-23388227

Website: [www.dglixian.com](http://www.dglixian.com)

E-mail: [sales1@hengzhunx.com](mailto:sales1@hengzhunx.com), [sales2@hengzhunx.com](mailto:sales2@hengzhunx.com)

Adress: Xinhe Management of area, Wanjiang District, Dongguan city, Guangdong province, China



HENGZHUN

东莞力显仪器科技有限公司

DONG GUAN LIXIAN INSTRUMENT SCIENTIFIC CO.,LTD



刀模

cutter



**Tester summary:**

the main function of DIN abrasive tester is to test the friction of surface by a particular piece of sandpaper, After friction for a certain time, and then assess the condition of material surface, weight, volume and thickness, from this standard to assess the abrasive nature

**Tel: +86 769-23388229**

**Fax:+86 769-23388227**

**Website: [www.dglixian.com](http://www.dglixian.com)**

**E-mail: [sales1@hengzhunx.com](mailto:sales1@hengzhunx.com), [sales2@hengzhunx.com](mailto:sales2@hengzhunx.com)**

**Adress:Xinhe Management of area, Wanjiang District, Dongguan city, Guangdong province, China**



HENGZHUN

东莞力显仪器科技有限公司

DONG GUAN LIXIAN INSTRUMENT SCIENTIFIC CO.,LTD

---

of materials.

**Main functions:**

This tester is a high efficiency, good reproducibility and easy to operate, applied to test the abrasive nature of material, as such elastic material, rubber, tires, convey belt, transmit belt, sole, synthetic leather, leather and others.

**corresponding standard :**

DIN-53516; ISO-4649; GB/T9867-88;

**Applicable industry:**

Applied to test leather performance in shoes, clothing, luggage handbag industry, research laboratories; commodity inspection, arbitration and technical supervision departments

**Technical parameters:**

Specimen Size: dia 16mm, thickness at least 6mm.

Specimen Load: 10N± 0.2N.

Diameter of wear wheel: dia 150mm.

Speed of wear wheel: 40 ±1RPM.

Emery cloth Specification: 60 #, seam is less than 2mm.

Testing Length: 40M (about 84 rotate).

Horizontal displacement: 4.2mm / rotate.

**Machine Specifications:**

Test-arm weight: 250 ± 5 (g).

---

**Tel: +86 769-23388229**

**Fax:+86 769-23388227**

**Website: [www.dglixian.com](http://www.dglixian.com)**

**E-mail: [sales1@hengzhunx.com](mailto:sales1@hengzhunx.com), [sales2@hengzhunx.com](mailto:sales2@hengzhunx.com)**

**Adress:Xinhe Management of area, Wanjiang District, Dongguan city, Guangdong province, China**

---



HENGZHUN

东莞力显仪器科技有限公司

DONG GUAN LIXIAN INSTRUMENT SCIENTIFIC CO.,LTD

---

Testing Load: 2.5N, 7.5N.

Diameter abrasive wheel: dia 150 ± 450L (mm).

emery cloth: 60 #, 425 ± 473 ± 1.5 (mm).

Wheel Speed: 40 ± 1RPM.

Shift screw: 6 teeth / inch.

Limit rotation : 85 rotate.

Set rotation: 84 rotate (about 40M).

Return form: Electric automatic reset.

Drive Power: 40W; 1 / 30.

Power: 220V 50HZ.

Machine Dimensions: 600 ± 330 ± 420 (mm).

Machine Weight: 75kg.

---

**Tel: +86 769-23388229**

**Fax:+86 769-23388227**

**Website: [www.dglixian.com](http://www.dglixian.com)**

**E-mail: [sales1@hengzhunx.com](mailto:sales1@hengzhunx.com), [sales2@hengzhunx.com](mailto:sales2@hengzhunx.com)**

**Adress: Xinhe Management of area, Wanjiang District, Dongguan city, Guangdong province, China**

---