
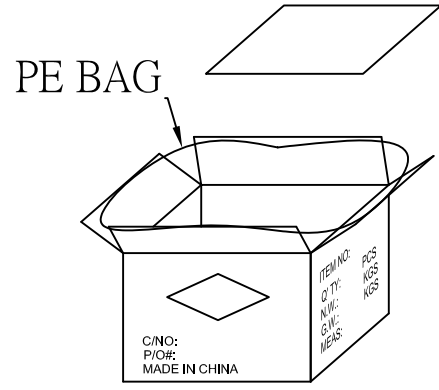


- NOTE:**
- TESTING CONDITIONS:
    - A: INSULATION RESISTANCE: 5MΩ;
    - B: VOLTAGE: DC300V/0.01S
    - C: CONDUCTOR RESISTANCE 3Ω;
    - D: CAPACITANCE: 10nF±30%;
    - E: ELECTRIC CURRENT: 5.0A MAX;
    - F: Transmission rate: MORE THAN 700MB/S;
    - G: CABLE MUST BE OPEN/SHORT/MISWIRE 100% TEST.
  - PACKING: 1PCS/PE-BAG
  - ROHS&REACH

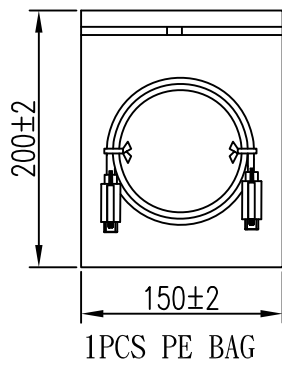

|    |      |  |        |
|----|------|--|--------|
| 5  | 2    | SCREWS: M2*0.4-6g  |        |
| 4  | AR   | OVER MOLDING: 35P PVC BLACK  |        |
| 3  | AR   | INTERNAL MOLDING: PE   |        |
| 2  | 2    | USB 3.1 C TYPE MALE: GOLD PLATED CONTACTS, NICKEL PLATED SHELL, SEAMLESS STRETCH   |        |
| 1  | 1    | USB 3.1 CABLE: UL2725, [32#(7/0.08TC)*1P+D+AL/MY]*4C+[32#(7/0.08TC)*1P+AL]*1C+32#(7/0.08TC)*4C+22#(65/0.08TC)*2C+AB(85%TC), BLACK PVC JACKET, OD:5.0±0.2mm |        |
| NO | Q'TY | DESCRIPTION  | REMARK |

|                  |                             |   |             |                   |
|------------------|-----------------------------|---|-------------|-------------------|
| <b>P-shine</b>   | P-SHINE ELECTRONIC TECH LTD |   | SCALE: NONE | UNIT: mm          |
| <b>DRAWING</b>   |                             | P/N:  |             | PAGE: 1/2         |
| <b>CHECKED</b>   |                             | CUST P/N:                                   |             | DWG NO: MF-GV1119 |
| <b>RECHECKED</b> |                             | SPEC: USB 3.1 CM TO CM WITH SCREW LOCK 2.0M |             |                   |
| <b>APPROVED</b>  |                             | RFQ NO.                                     |             |                   |