

Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band: 8-10GHz
- Gain: 40dB
- Output Power Psat: 44dBm
- Bias: Vd=28V;Id=6A

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range	8.0-10			GHz
Small Signal Gain		40		dB
Gain Flatness		±1	±2.5	dB
Gain Variation Over Temperature			±2	dB
Input VSWR		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)		41		dBm
Saturated Output Power (Psat)		44		dBm
Harmonic Rejection		15		dB
Input Max Power(no damage)			+15	dBm
Internally Generated Spurious		-60		dBc
DC Current (Vcc=+28V) (@Pout=25W)		5		A
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium			
Weight	300g			
Dimension	110X80X12mm			

Environmental Conditions

Operational Temperature	-35°C~+70°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	+30V
RF INPUT POWER	+15dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

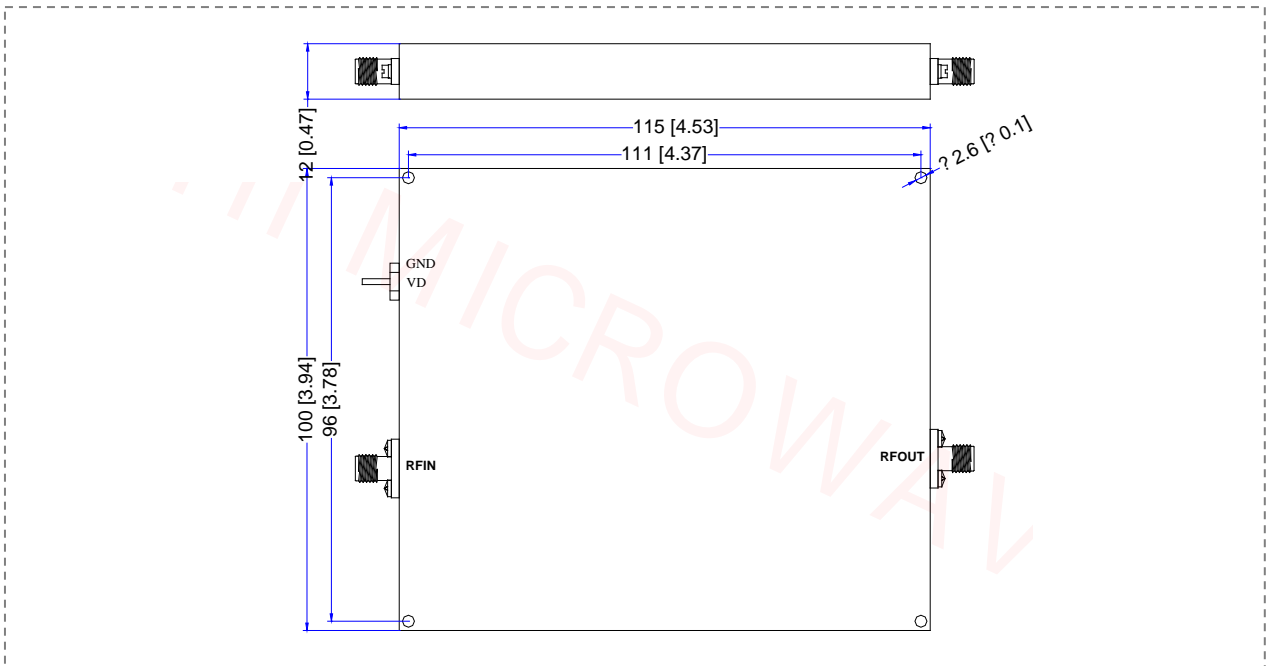

*****Heat Sink required during operation*****