

# MODEL HIPA23352028

## 23-35GHz Broadband Power Amplifier



Note: The photo is for illustration purposes only. Please refer to outline drawing

### ■ Features

- Ultra Wide Band: 23-35GHz
- Gain: 20dB
- Output Power Psat: 28dBm
- Bias: Vd=12V;Id=0.5A

### ■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

### □ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range	23-35			GHz
Small Signal Gain		20		dB
Gain Flatness		±2.0		dB
Input VSWR		2.0		-
Output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		28		dBm
Saturated Output Power (Psat)		29		dBm
Input Max Power(no damage)			15	dBm
DC Current (Vcc=+6~15V)		500	1000	A
Impedance	50			Ω
Input Output Connector	2.92			
Material	Aluminium/Gold Painting			
Weight	200g			
Dimension	50mmX45mmX12mm			

### Environmental Conditions

<b>Operational Temperature</b>	-45°C~+85°C	<b>Vibration</b>	25g rms (15 degree 2KHz) endurance, 1 hour per axis
<b>Storage Temperature</b>	-55°C~+125°C	<b>Shock</b>	20G for 11msc half sin wave, 3 axis both directions
<b>Executive Standard</b>	MIL-STD-810G	<b>Humidity</b>	100% RH at 35c, 95%RH at 40°C


### Absolute Maximum Ratings

<b>Supply Bias Voltage</b>	+20V
<b>RF INPUT POWER</b>	15dBm
<b>ESD sensitivity (HBm)</b>	Class 0, passed 150V

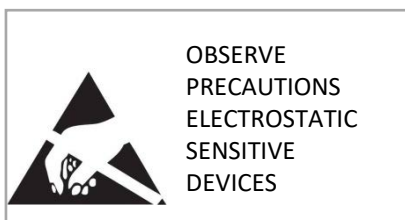

### Outline Drawing

All Dimensions in mm ( inches ) Tolerance  $\pm 0.25$  ( 0.01 )

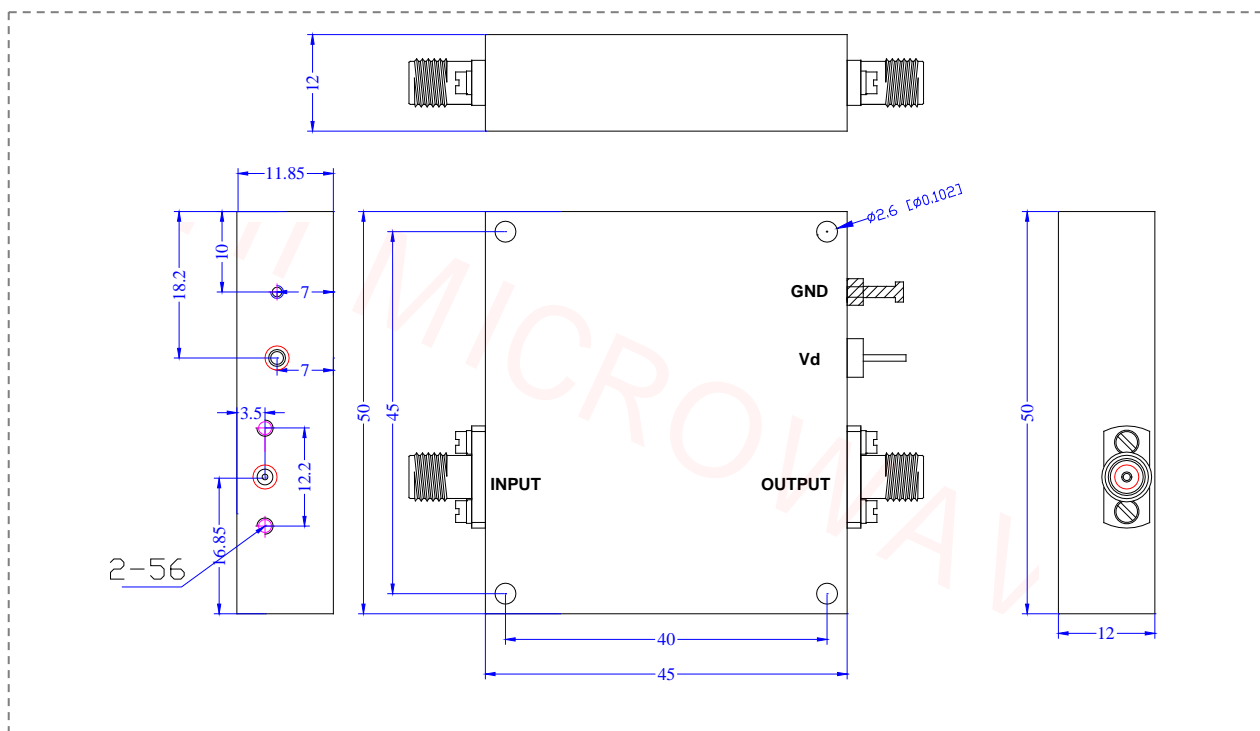

**\*\*\*Heat Sink required during operation\*\*\***