

Note: The photo is for illustration purposes only.  
Please refer to outline drawing

### ■ Features

- Ultra Wide Band: 26-40GHz
- Gain: 30dB
- Output Power: 32dBm
- High Output IP3: 40dBm

### ■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

### □ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range	26-40			GHz
Gain	28	30		dB
Gain Flatness		± 2.5		dB
Input VSWR		2.0		dB
Output VSWR		2.0		dB
Output Power for 1 dB Compression (P1dB)	31			dBm
Saturated Output Power (Psat)		32		dBm
Input Max Power(no damage)			10	dBm
Non-Harmonic Spurious	60	-62		dBc
DC Current (Vcc=+12V)		2.0	2.5	A
Impedance	50			Ω
Input Output Connector	2.92			
Material	Aluminium			
Weight	50g			
Size	56mmX55mmX12mm			
Package Sealing	General Sealing (Standard) Hermetically Seal(Optional)			

### Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C


### Absolute Maximum Ratings

Supply Bias Voltage	+15V
RF INPUT POWER	10dBm
ESD sensitivity (HBm)	Class 0, passed 150V

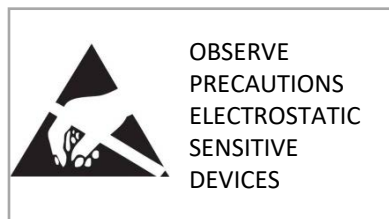

### Outline Drawing

All Dimensions in mm ( inches ) Tolerance  $\pm 0.25$  ( 0.01 )

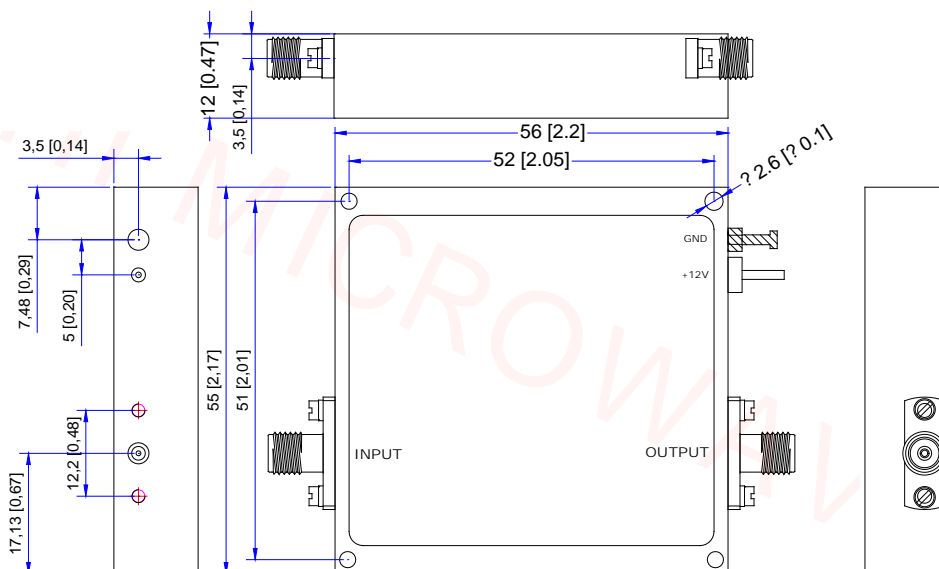

**\*\*\*Heat Sink required during operation\*\*\***