

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 26-40GHz
- Gain: 30dB
- Output Power: 32dBm
- High Output IP3: 40dBm

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range	26-40			GHz
Gain	32	35		dB
Gain Flatness		± 1.5		dB
Input VSWR		2.0		dB
Output VSWR		2.0		dB
Output Power for 1 dB Compression (P1dB)	30	32		dBm
Saturated Output Power (Psat)		33		dBm
Input Max Power(no damage)			20	dBm
Non-Harmonic Spurious		60		dBc
DC Current (Vcc=+12V)		3.5	4	A
Impedance	50			Ω
Input Output Connector	2.92-K			
Material	Aluminium			
Weight	80g			
Size	55mmX56mmX12.7mm			
Package Sealing	General Sealing (Standard) Hermetically Seal(Optional)			

Environmental Conditions

Operational Temperature	-25°C~+65°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	+15V
RF INPUT POWER	20dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

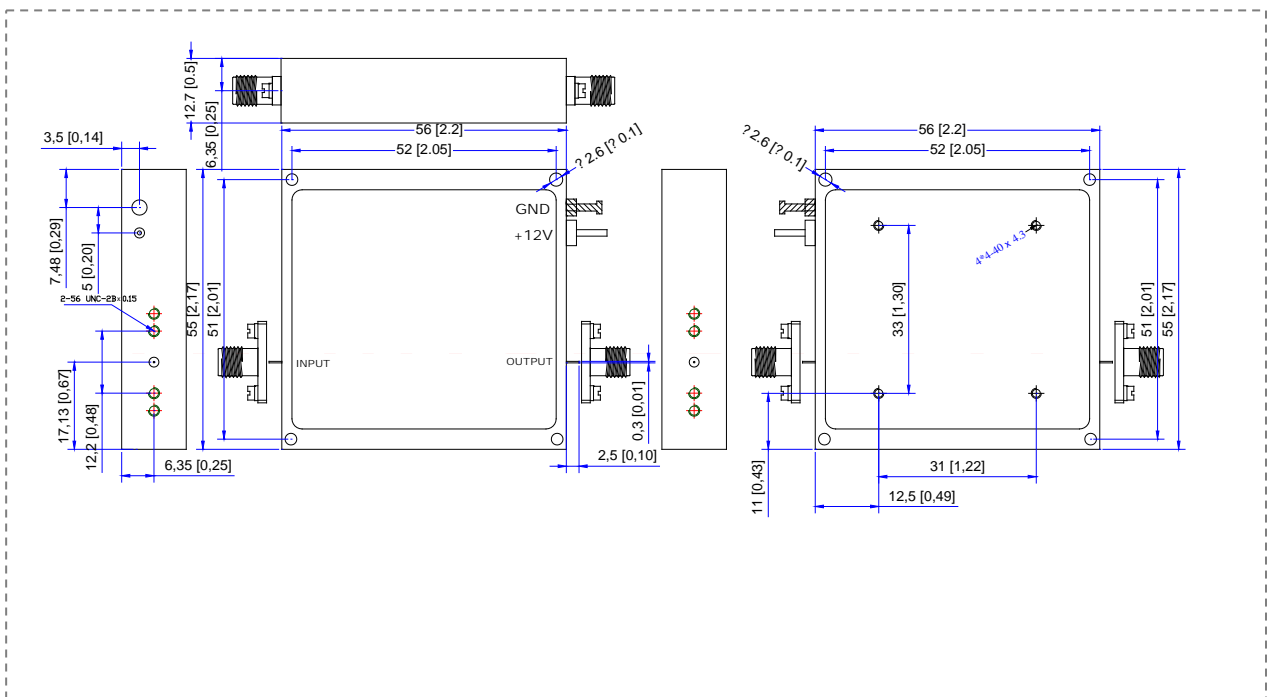

*****Heat Sink required during operation*****