




MODEL HIPA01065050

1-6GHz Power Amplifier



■ Features

- Ultra Wide Band: 1-6GHz
- Gain: 53dB
- Output Power Psat: 50dBm
- Bias: Vd=30V;Id=10A

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	1-6			GHz
Small Signal Gain	50	53		dB
Power Gain Flatness		±4	±5	dB
Input /Output VSWER		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)		47		dBm
Saturated Output Power (Psat)		50		dBm
Input Max Power(no damage)			10	dBm
2-Tone Intermodulation (IMD) 40dBm/Tone, Δ = 1 MHz		-30		dBc
Harmonics		-15		dBc
Spurious	-60			dBc
DC Current (Vcc=+30V) (@Pout=100W)		10	13	A
Impedance	50			Ω
TTL Control "Low"/"High"	Low: Enable / High: Disable			
Control Connector DB9	Pin: 1,2,3 VD; 4 TTL, 5 Power detection;7,8,9 GND			
Input Output Connector	SMA-k/N-K			
Material	Aluminium			
Function	Overtemperature protection overcurrent protection VSWR protection			
Dimension	300X220X70mm With Heatsink and Fan			

Environmental Conditions

Operational Temperature	-35°C~+70°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave,3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C


Absolute Maximum Ratings

Supply Bias Voltage	+32V
RF INPUT POWER	+10dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

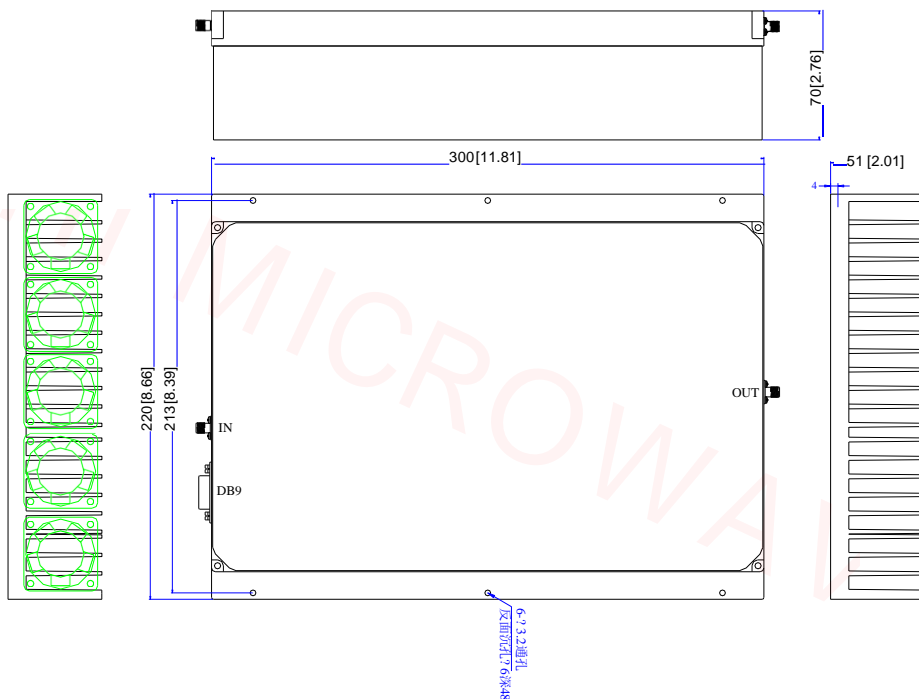

*****Heat Sink required during operation*****