

MODEL HILNAT1263840

0.1-26.5GHz Broadband Amplifier



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band: 0.1-26.5GHz
- Gain: 38dB
- Output Power: 15dBm
- High Output IP3: 28dBm

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.1-26.5			GHz
Gain		38		dB
Gain Flatness		±2		dB
Gain Variation Over Temperature		±1		dB
Input VSWR		2.0		
Output VSWR		2.0		
Output Power for 1 dB	12	15		dBm
Saturated Output Power (Psat)		16		dBm
Noise Figure		4	6	dB
OIP3		25		
Input Max Power(no damage)			-20	dBm
DC Current (Vcc=6~+15V)		500		mA
Impedance	50			Ω
Input Output Connector	2.92			
Material	Aluminium			
Weight	30g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Operational Temperature	-10°C~+60°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	18V
RF INPUT POWER	-20dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

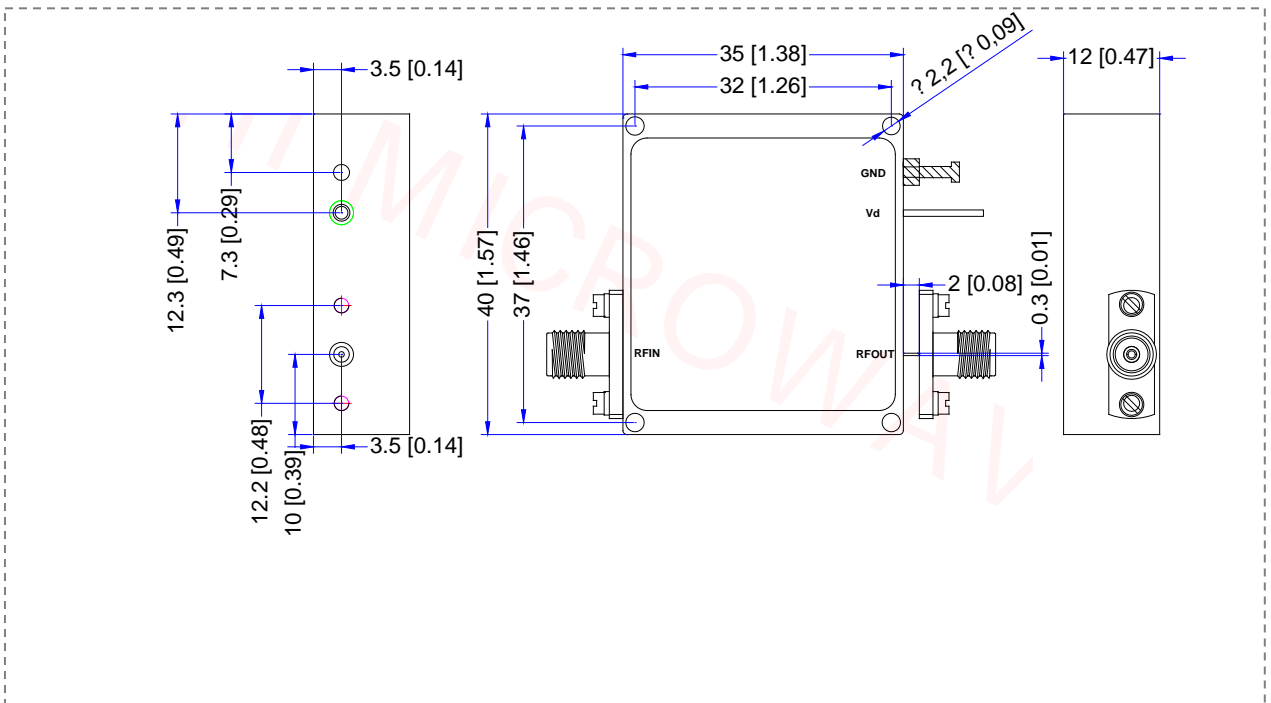

*****Heat Sink required during operation*****