由 Autodesk 教育版产品制作

Drawing name:

Version: A /0

Front view

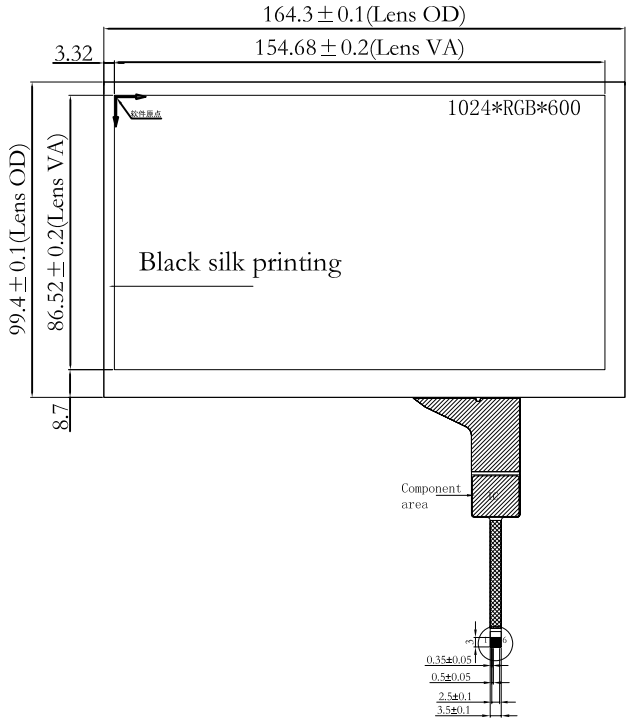

Side view

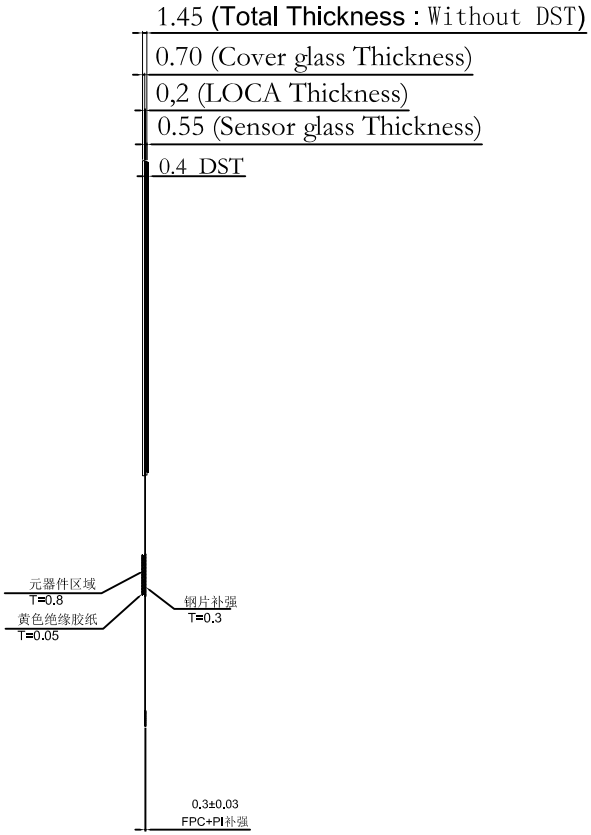

Back view

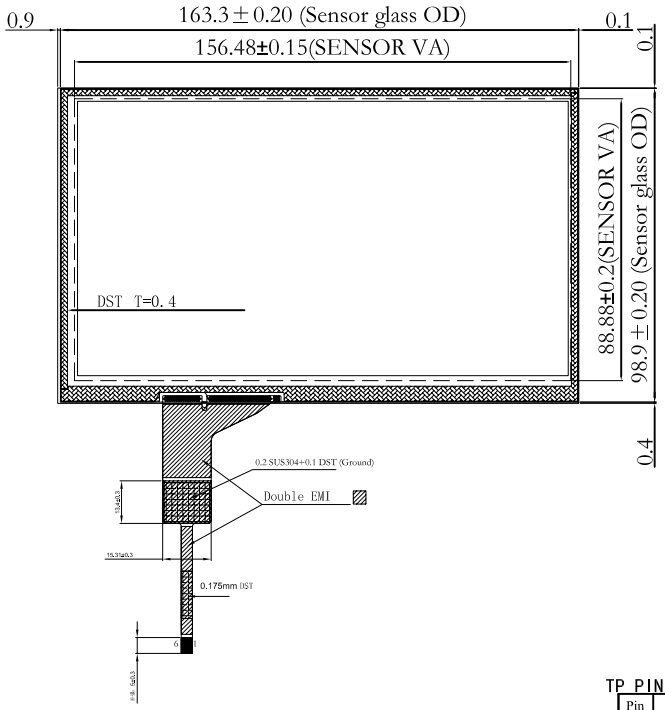

TP PIN SYMBOL

Pin	SYMBOL
1	VDD
2	Shutdown
3	SDA
4	SCL
5	INT
6	GND

Technical parameters:

1. IC: IGT911
Cover GLASS:0.7mm
LOCA:0.2mm
ITO SENSOR:0.55mm
Lead line:FPC (PINCH=0.5mm)
Total thickness: 1.45±0.15mm
2. Working voltage: 2.8V-3.3
3. Light transmittance: ≥82%
4. Surface hardness: 6H
5. Operating temperature: -20℃~+70℃, ≤90%RH
6. Storage temperature: -30℃~+80℃, ≤90%RH

Instructions:

1. Structure type: Glass+Glass.
2. Unmarked tolerance :±0.20;
3. Comply with ROHS standards;

VER	Describe	Data
V00	New design	2019/7/3

Unmarked tolerance				
0.00~5.00	±0.1	>10	±0.20	3RD ANGLE PROJN
5.00~10.00	±0.15	Angle	±0.5°	

深圳市万天源光电有限公司
Shenzhen Wanty Photoelectric Co.,Ltd

Customer ID		RD	
Document number	WTY070144A15		
Data	2019/7/3		
Proportion	1:1	Unit	mm

由 Autodesk 教育版产品制作