由 Autodesk 教育版产品制作

Drawing name：

Version：A /0

Front view

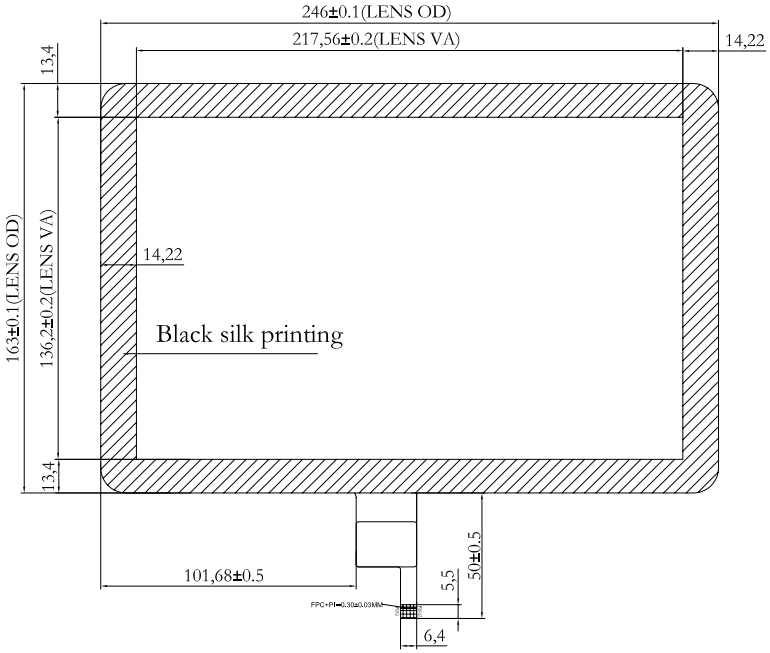

Side view

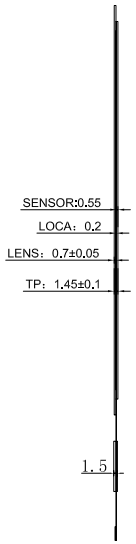

Back view

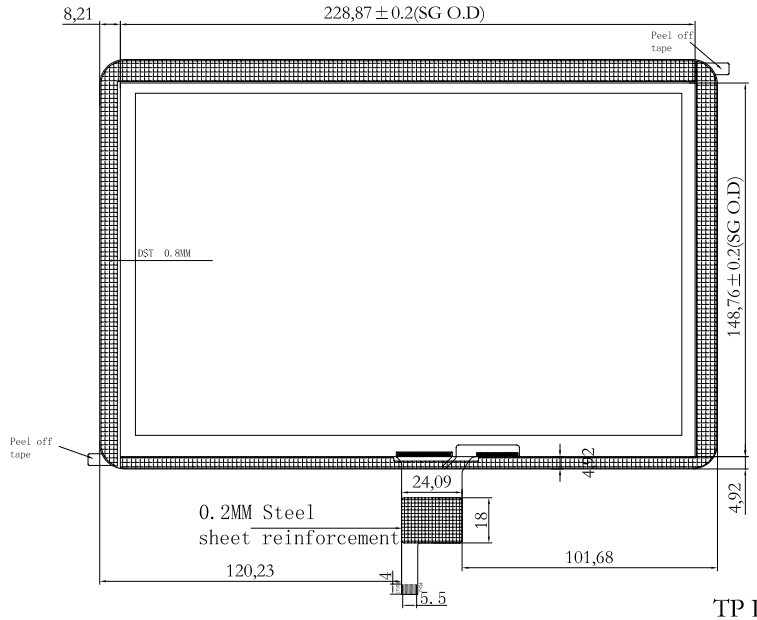

TP PIN Symbol

PIN	Symbol
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RST
10	INT
11	3.3V
12	3.3V

Technical parameters:

1. IC:
Cover GLASS:0.7mm
LOCA:0.2mm
ITO SENSOR:0.55mm
Lead line:FPC (PINCH=0.5mm)
Total thickness: 1.45±0.15mm
2. Working voltage: 2.8-3.3V
3. Light transmittance: ≥82%
4. Surface hardness: 6H
5. Operating temperature: -20℃~+70℃, ≤90%RH
6. Storage temperature: -30℃~+80℃, ≤90%RH

Instructions:

1. Structure type: Glass+Glass.
2. Unmarked tolerance :±0.20;
3. Comply with ROHS standards;

VER	Describe	Data
V00	New design	2019/12/06
V01		

Unmarked tolerance			
0.00-5.00	±0.1	>10	±0.20
5.00-10.00	±0.15	Angle	±0.5°

3RD ANGLE PROJN

深圳市万天源光电有限公司
WANTY Shenzhen Wanty Photoelectric Co.,Ltd

Customer ID		RD	
Document number	WTY101A08A01		
Data	2019/12/06		
Proportion	1:1	Unit	mm

由 Autodesk 教育版产品制作