





Drawing name:

Version: A /0

Front view

Side view

Back view

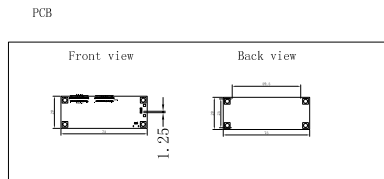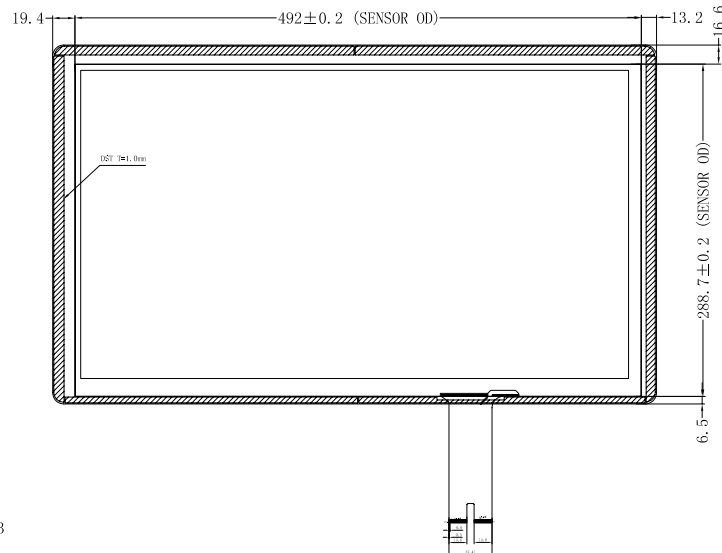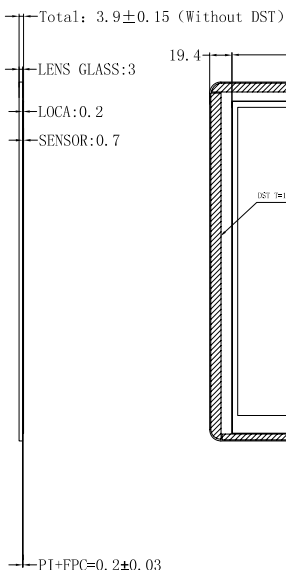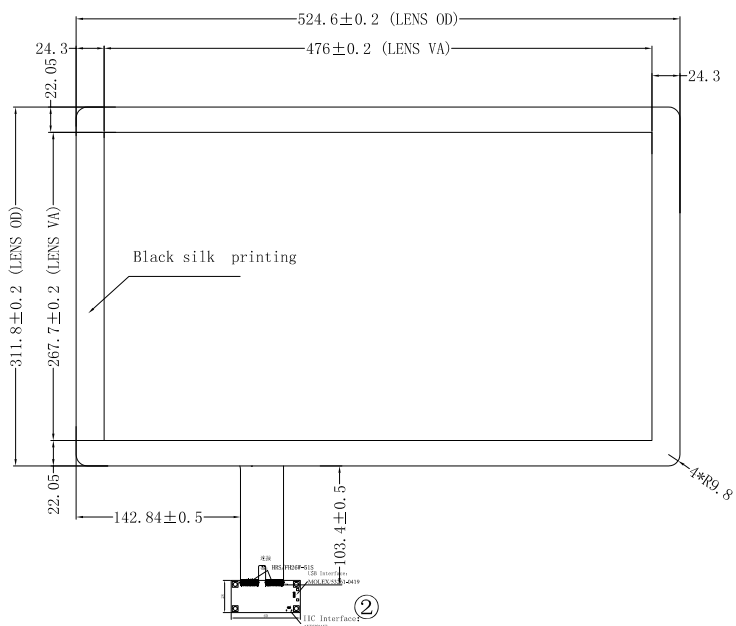

**Technical parameters:**

- IC: ILI2510
- Cover GLASS:3mm
- LOCA:0.2mm
- ITO SENSOR:0.7mm
- Lead line:FPC (PINCH=0.6mm)
- Total thickness: 3.9±0.15mm(Without DST)
- USB Working voltage: 5V
- Light transmittance: ≥82%
- Surface hardness: 6H
- Operating temperature: -20℃~+70℃, ≤90%RH
- Storage temperature: -30℃~+80℃, ≤90%RH

**Instructions:**

- Structure type: Glass+Glass.
- Unmarked tolerance :±0.20;
- Comply with ROHS standards;

**USB Symbol**

PIN	SYMBOL
1	VDD
2	D-
3	D+
4	GND

VER	Describe	Date
V00	New design	2019/5/21
Unmarked tolerance		
0.00-5.00	±0.1	>10 ±0.20
5.00-10.00	±0.15	Angle ±0.5°

**深圳市万天源光电有限公司**  
WANTY Shenzhen Wanty Photoelectric Co., Ltd

Customer ID	21.5" CTP Assessment	ID	
Document number	WTY215599A01		
Data			
Proportion	1:1	Unit	mm



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作